



LIGHTPLANE+ 1R


LPX1R | RECESSED



SPECIFICATIONS

PROFILE	1 1/2" Aperture, 3 3/16" Height (Shortest height listed above. See mechanical diagrams for other heights)
LENGTHS	Build-to-Order: Individual/Continuous Lengths Shapes/Patterns
LED OUTPUT	350 - 1,200lm/ft, up to 169 lm/W
CCT/CRI	2700K/3000K/3500K/4000K/5000K • 80 or 90+ CRI Tunable White (2700K - 6500K) • RGB and RGB+W
DIMMING/ DRIVER	Integral and Remote Driver: 0-10V, Phase, DALI, DMX, eldoLED, Lutron®, POE (Molex, NuLEDs, WTEC Smartengine). Dimming to 0% for select models.
EMBEDDED CONTROLS	Acuity nLight, Avi-on, Casambi, Cooper Wavelinx, Encelium, Lutron Athena, Lutron Vive, NX Controls, Wattstopper, and more
POWER	2.1W - 12.2W per ft
INPUT	120VAC, 277VAC, or 347VAC
OPTICS	Lambertian <i>(more optics coming soon)</i>
LENS	Standard Press Fit Lens in Flush and Regressed
FINISHES	16 powder coat finishes. RAL and Custom finishes also available
MATERIAL	6063-T6 Extruded Aluminum, See Declare listing here
ENVIRONMENT	Dry or damp locations
WARRANTY	11 years
WELL/UGR	See ALW WELL & BIOS pages for recommended options that contribute to meeting the WELL Building Standard™

DISTRIBUTIONS & PROFILES

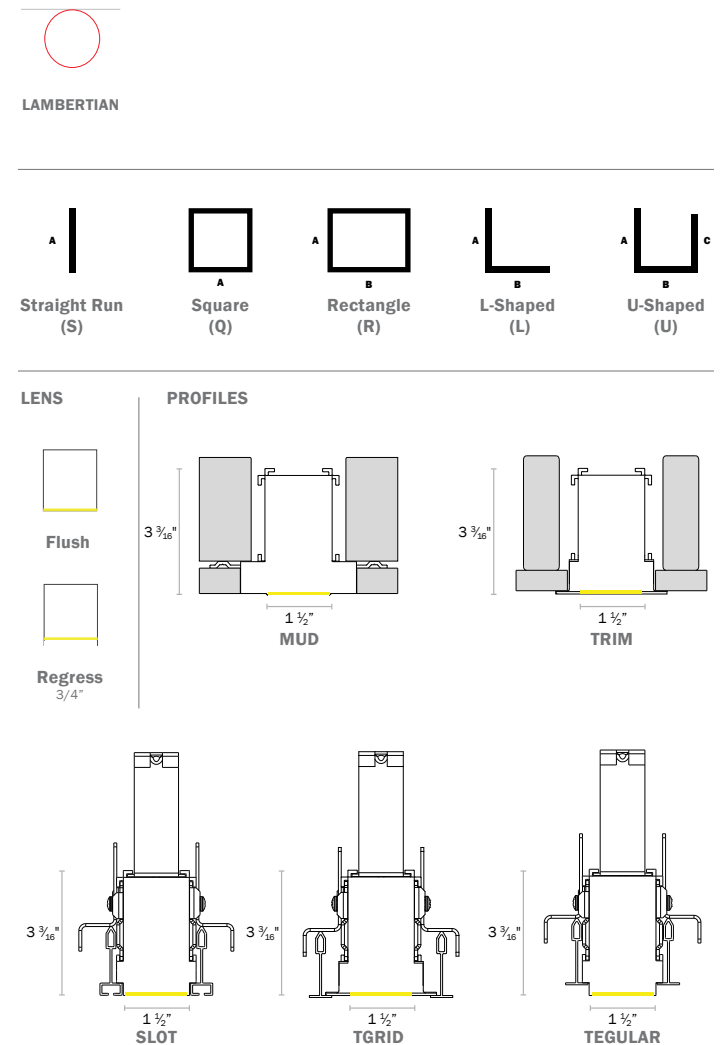

Not to scale. Dimensions are nominal. Consult factory for CAD drawing





PRODUCT SPECIFICATION SHEET

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

EXAMPLE: LPX1RMDFN — S8 — 053090SLV00 — SW — UNV — EMC/2 — N — N — DC — QS

1. FAMILY	2. SIZE	3. MODEL (CHOOSE 1)	4. MOUNTING (CHOOSE 1)	5. LENS TYPE (CHOOSE 1)
-----------	---------	---------------------	------------------------	-------------------------

QS	LPX	Lightplane ⁺	QS	2	1"	QS	R	Recessed Direct	QS	MD	Mud	QS	FN ⁺	Flush Lens
									QS	TM ⁺	Trim		RN ⁺	Regress Lens (3/4")
									QS	T9	TGrid 9/16			
									QS	T5	TGrid 15/16			
										HF	Hidden Flange			
										ST	Slot			
										G9	Tegular 9/16			
										G5	Tegular 15/16			
										AS ^{2,3}	Armstrong Techzone® Slot			
										A9 ^{2,3}	Armstrong Techzone® T-grid 9/16			
										A5 ^{2,3}	Armstrong Techzone® T-grid 15/16			
										AG ^{2,3}	Armstrong Techzone® Tegular 9/16			
										AW ³	Armstrong Woodworks®			
										AM ³	Armstrong Metalworks®			

¹For install in wood, drywall, metal, etc.

²Fits Armstrong 4" TechZone®.

³All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.


6. SHAPE/LENGTH ⁺ (CHOOSE 1 & ENTER LENGTH IN FEET) - FOR CUSTOM ANGLES, CONTACT ALW	7. LUMENS ⁺ (CHOOSE 1)	8. CCT (CHOOSE 1)
---	-----------------------------------	-------------------

QS	S__	Individual/Straight Run Section (enter length in product code above, ex. S18)	QS	03	350lm/ft	QS	N	Choose for RB, RW, or BO
QS	Q__	Square Configuration (enter side length A, ex: Q18)	QS	05	500lm/ft		27'	2700K
QS	R__/_	Rectangular Configuration (enter side lengths A and B, ex. R12/24)	QS	07	750lm/ft	QS	30	3000K
QS	L__/_	L-Shaped Configuration (enter side lengths A and B, ex. L12/24)	QS	10	1000lm/ft	QS	35	3500K
QS	U__/_/_	U-Shaped Configuration (enter side lengths A, B, and C, ex. U12/12/24)	QS	12	1200lm/ft	QS	40	4000K

⁺To qualify for QS, all corners of shape must be 90°, same plane

^{*}Lengths greater than 8' consist of multiple individual housing sections joined together. Lengths are nominal and may vary based on lamping and other specification selections. Consult ALW when exact lengths are required.

^{*}ALW regularly builds simple and complex mitered patterns not shown above. Contact ALW and provide a RCP with your layout to get started.



^{*}For delivered lumens power, see 'Performance Details' on p. 11.

⁵Write in desired lm/ft (100 - 1200lm/ft). Static BIOS SkyBlue® 490nm LED is always on. Dynamic BIOS SkyBlue® 490nm LED can be tuned off.

⁶Custom lumens available from 100 - 1200lm/ft.

²2700K only available in 90CRI.

⁵5000K only available in 80CRI.

^{*}Tunable White (TW) not available with BIOS. BIOS has its own tunable white option to be specified by request.

9. CRI (CHOOSE 1)	10. OPTICS ⁺ (CHOOSE 1)	11. DRIVER ⁺ (CHOOSE 1)
-------------------	------------------------------------	------------------------------------

QS	N	Choose for RB, RW, or TW	QS	SL ¹⁰	Standard Lambertian	QS	V00	0-10V, dim to 0%
QS	80	80CRI				QS	V01	0-10V, dim to 1%
QS	90	90CRI					LDE	Lutron LDE1 Ecosystem, dim to 1%
							P01 ¹¹	ELV/TRIAC phase dim to 1%
							ELO	eldoLED, 0-10V dim to 0%
							DAL	DALI, dim to 0%
							DMX ¹²	DMX, dim to 0%
							POE ¹³	POE Ready
							CM ¹⁴	Custom driver



⁺See 'LED DRIVERS' on p. 13 for various tables. 'Driver Details' has a full description of each driver spec. 'Driver/LED Compatibility' describes the compatible driver and LED combinations. 'Driver Location' describes the driver location (integral or remote) depending on the LED you choose.

¹¹Phase dim drivers are 120 VAC only.

¹²For RGB (RG) and RGBW (RW) LEDs, driver will be provided in a remote driver enclosure as it does not fit in the fixture body.

¹³Luminaire built as a driverless fixture. Contact ALW with your POE node specs and we will provide fixture voltage, current, and wattage details for POE node commissioning.

¹⁴Contact ALW to specify special request 3rd party LED drivers.

QS = QuickShip-qualifying option. For the entire luminaire configuration to be QuickShip-eligible, ALL options specified in the configuration must be ones notated with "QS".

NOTE: Maximum 800 ft. of QuickShip-eligible product per order.

Rev 110325



PRODUCT SPECIFICATION SHEET CONT'D

12. FINISH* (CHOOSE 1)	13. VOLTAGE (CHOOSE 1)	14. EMERGENCY CIRCUITS (OPTIONAL)	15. CONTROL OPTIONS* (OPTIONAL)
STANDARD FINISHES QS SW ☐ Satin White QS SB ☒ Satin Black QS AS ☐ Aluminum Silver Anodized Effect QS TB ☒ Textured Black PREMIUM FINISHES ___ See chart on page 10 for premium finishes. Manually type in the finish code (Ex: OB = Oil-Rubbed Bronze) SPECIAL ORDER FINISHES* RAL_____ Specify RAL Classic Color (Ex: RAL 3003) CCM_____ Custom Color Match *Manually type in the finish code for special order finish types.	QS UNV¹⁵ Universal Voltage (120VAC-277VAC) 347¹⁶ 347 Volt (Driver options may be limited. Not available with EMB) ¹⁸ Choose UNV for phase dimming driver (PO1) but is available in 120VAC only. ¹⁹ 347V available with 0-10V drivers only. Not available with Emergency Battery (EMB).	QS N None QS EMC/___¹⁷ Emergency power feed whip for connection to remote Generator Transfer Devices (Specify 1x for every 4ft or contact ALW for longer runs) QS EMB/___ 10W Integral Emergency Battery (Specify 1x for every 4ft of emergency lighting) GTD/___ Integral Generator Transfer Device/Switch Bypass - 3A (Specify 1x for every 4ft) *Emergency Battery options are direct lighting only. EMBs deliver roughly 1100 total lumens, or 275lm/ft for a 4ft section. ¹⁷No EM components provided. EMC lengths come standard as 4ft. Contact ALW for entire fixture to be EMC or if you'd like longer lengths. Power whip will be labeled as EMC.	QS N None FACTORY CONTROLS QS OS/PH/INT/___ Integral Occupancy/Daylight sensor QS OS/PH/HV/___ Remote Occupancy/Daylight sensor NETWORK CONTROLS Embedded controls below are placeholder specs. See the ALW Controls Guide to finalize your final control spec. AY/xx Acuity AN/xx Avi-on CA/xx Casambi CW/xx/___ Cooper Wavelinx EC/xx/___ Enceium LU/xx/___ Lutron NX/xx/___ NX Controls WA/xx/___ Wattstopper *Quickship availability on occupancy and photocell daylight sensors may vary. Contact ALW for more information. *Contact ALW for Additional Zone specifications. *Most embedded controls do not fit in the LPX1 fixture body. If you choose an embedded control node, the LED driver and embedded control node will be mounted to a remote driver enclosure. See the ALW Controls Guide for embedded control compatibility and driver control location.
16. ADDITIONAL OPTIONS - A (OPTIONAL)	17. ADDITIONAL OPTIONS - B* (INCLUDED)	18. QUICKSHIP OPTIONS	
QS N None QS CP Chicago Plenum	QS DC Living Building Challenge Declared and Red List Approved * See Declare page for LP+ Declare listing	QS Select if you want your fixture to be QS Note: To be eligible for the Quickship (QS) program, all previous selected options must also be marked QS	

QS = QuickShip-qualifying option. For the entire luminaire configuration to be QuickShip-eligible, ALL options specified in the configuration must be ones notated with "QS".
NOTE: Maximum 800 ft. of QuickShip-eligible product per order.


Rev 110325




LENS & OPTICS COMPATIBILITY

LENS/OPTICS COMPATIBILITY		
OPTICS		
STANDARD LAMBERTIAN (SL)		
LENS TYPES	FLUSH (FN)	•
	REGRESSED (RN)	•

ASYMMETRIC LEFT (AL)

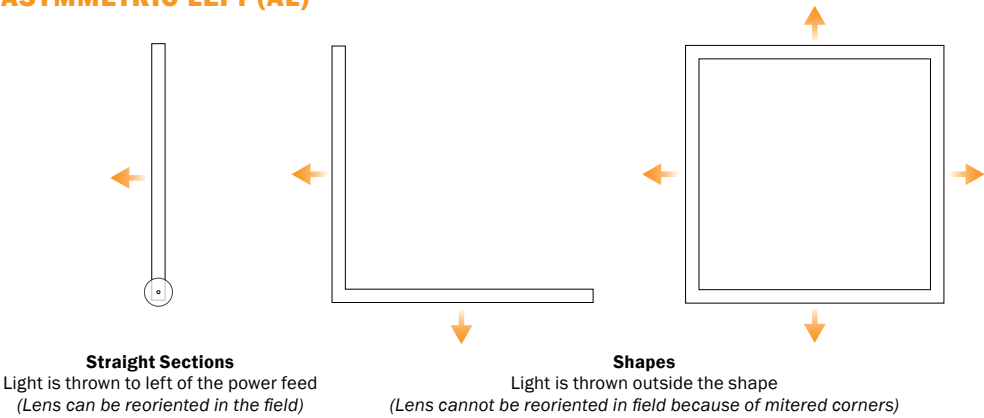

ASYMMETRIC RIGHT (AR)

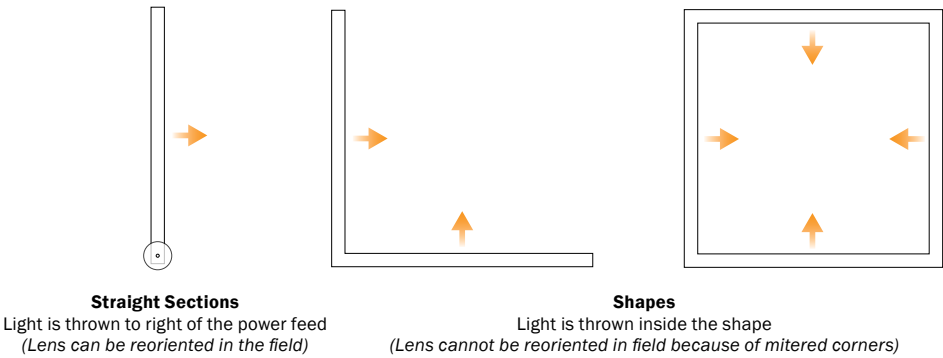




LENS DETAILS


Applicable to all models

— FIXTURE BODY

— LENS




F
FLUSH




R
REGRESS LENS


MECHANICAL DIAGRAMS




LPX1RMDFN
RECESSED MUD-IN
FLUSH LENS




LPX1RMDRN
RECESSED MUD-IN
REGRESSED LENS




LPX1RTMFN
RECESSED TRIM
FLUSH LENS



LPX1RTMRN
RECESSED TRIM
REGRESSED LENS



LPX1RSTFN
RECESSED SLOT
FLUSH LENS

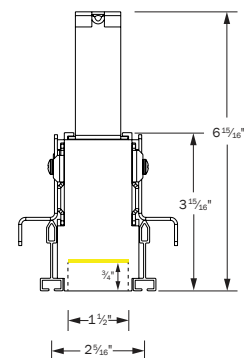


LPX1RSTRN
RECESSED SLOT
REGRESSED LENS


Rev 110325




MECHANICAL DIAGRAMS CONT'D




LPX1RT9FN
RECESSED TGRID 9/16
FLUSH LENS

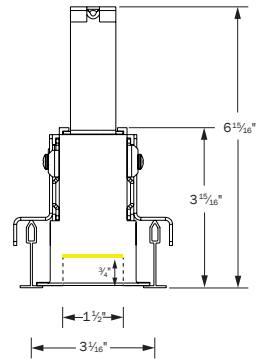


LPX1RT9RN
RECESSED TGRID 9/16
REGRESSED LENS




LPX1RT5FN
RECESSED TGRID 15/16
FLUSH LENS

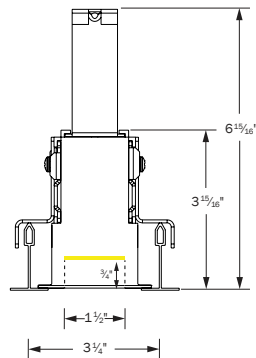

LPX1RT5RN
RECESSED TGRID 15/16
REGRESSED LENS



LPX1RHFFN
HIDDEN FLANGE
FLUSH LENS




LPX1RHFRN
HIDDEN FLANGE
REGRESSED LENS


Rev 110325




MECHANICAL DIAGRAMS CONT'D




LPX1RG9FN
RECESSED TEGULAR 9/16
FLUSH LENS

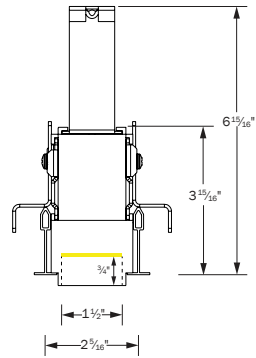


LPX1RG9RN
RECESSED TEGULAR 9/16
REGRESSED LENS




LPX1RG5FN
RECESSED TEGULAR 15/16
FLUSH LENS

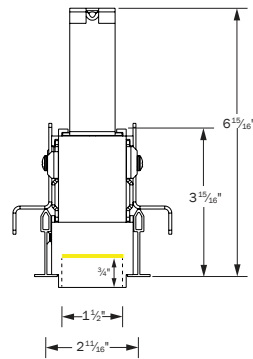

LPX1RG5RN
RECESSED TEGULAR 15/16
REGRESSED LENS




LPX1RASFN
RECESSED SLOT
ARMSTRONG TECHZONE®
FLUSH LENS

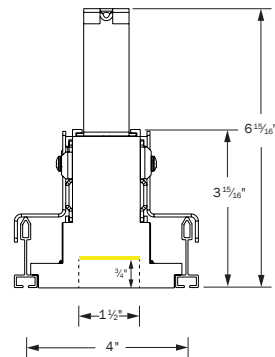


LPX1RASRN
RECESSED SLOT
ARMSTRONG TECHZONE®
REGRESSED LENS




MECHANICAL DIAGRAMS CONT'D




LPX1RA9FN
RECESSED TGRID 9/16
ARMSTRONG TECHZONE®
FLUSH LENS

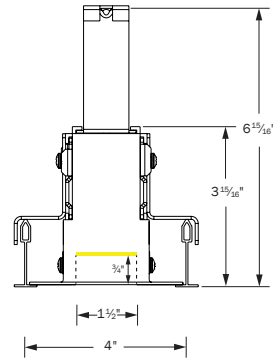


LPX1RA9RN
RECESSED TGRID 9/16
ARMSTRONG TECHZONE®
REGRESSED LENS




LPX1RA5FN
RECESSED TGRID 15/16
ARMSTRONG TECHZONE®
FLUSH LENS



LPX1RA5RN
RECESSED TGRID 15/16
ARMSTRONG TECHZONE®
REGRESSED LENS




LPX1RAGFN
RECESSED TEGULAR 9/16
ARMSTRONG TECHZONE®
FLUSH LENS

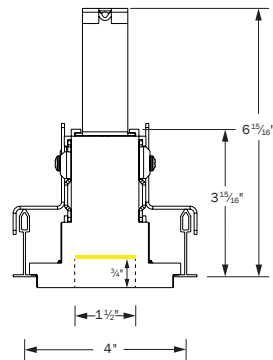


LPX1RAGRN
RECESSED TEGULAR 9/16
ARMSTRONG TECHZONE®
REGRESSED LENS




MECHANICAL DIAGRAMS CONT'D

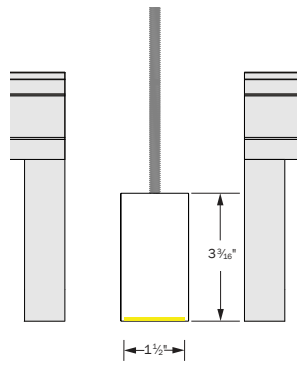


LPX3RAWFN
RECESSED ARMSTRONG
WOODWORKS®
FLUSH LENS

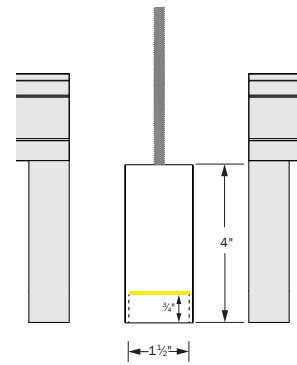

LPX1RAWRN
RECESSED ARMSTRONG
WOODWORKS®
REGRESSED LENS

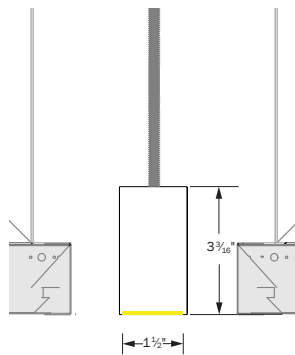

LPX1RAMFN
RECESSED
ARMSTRONG METALWORKS®
FLUSH LENS

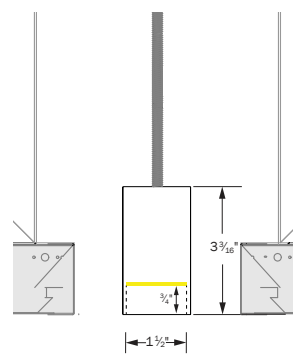

LPX1RAMRN
RECESSED
ARMSTRONG METALWORKS®
REGRESSED LENS




FINISHES

Standard finishes are available at no additional charge.

STANDARD FINISHES - QS ELIGIBLE




Satin
White
QS



Aluminum Silver
Anodized Effect
QS



Satin
Black
QS



Textured
Black
QS

PREMIUM FINISHES


BASIC POWDER COAT



Gloss
White



Antimicrobial
Gloss White



Textured
Matte
White

METALLIC POWDER COAT



Charcoal
Gray



Copper



Brass

SATIN ANODIZED EFFECT POWDER COAT



Oil-Rubbed
Bronze



Dark
Bronze

GLOSS POWDER COAT (80-95% GLOSS)



Orange
RAL 2003



Red
RAL 3020



Magenta
RAL 4010



Blue
RAL 5015

Contact ALW Quotes (quotes@alw-inc.com) for sample paint finish swatches.

SPECIAL ORDER FINISHES*



RAL CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

Most RAL Classic Colors are available for a minimum setup fee. On your specification submittal choose your RAL color by entering the 4-digit RAL code (Ex: RAL 3003). See www.alw-inc.com/resources/finishes



CUSTOM COLOR MATCH: CCM_ _ _ _

Custom powder coat color matching is available for a premium setup fee. Consult [ALW](#) for additional information.

*An individual setup fee will apply to each unique Special Order Finish per purchase order.
(ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)

*Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying



PERFORMANCE DETAILS - STANDARD LENSES

OUTPUT OPTION	OPTIC TYPE	DELIVERED LUMENS/FT	EFFICACY (LM/W)	WATTS/FT ¹⁷	CRI OPTIONS	CCT OPTIONS
03 ¹⁸	SL	366	121	3	80+ 90+	2700K 3000K 3500K 4000K 5000K
	V	351	101	3.5		
	SL (3/4" Regress)	359	91	3.9		
05 ¹⁸	SL	519	118	4.4		
	V	500	98	5.1		
	SL (3/4" Regress)	512	89	5.8		
07 ¹⁸	SL	768	115	6.7		
	V	768	96	8		
	SL (3/4" Regress)	754	87	8.7		
10 ¹⁸	SL	1009	113	8.9		
	V	1005	94	10.7		
	SL (3/4" Regress)	1003	85	11.8		
12 ¹⁸	SL	1219	112	10.9		
	V	1197	93	12.9		
	SL (3/4" Regress)	1090	84	12.9		
TUNE	SL (Warm White)	537	87	6.2	90	2700K - 6500K
	SL (Cool White)	569	92	6.2		
RGB ¹⁹	SL	107	23	4.7	-	
RGBW ¹⁹	SL (W)	103	55	1.9	W: 80 CRI	W: 3500K
	SL (RGB)	107	22	4.8		

¹⁷ Lumens/Watt and Watts/ft have been calculated assuming a driver efficiency of 85%. Depending on field conditions, actual measured values may fluctuate by 5-8%.


¹⁸ Performance calculations are based on LM-79 test of 1200lm output at 80 CRI and 3500K. All other output calculations are extrapolated values.

¹⁹ Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue) and White LED only illuminated




TM-30-18 DETAILS (90 CRI LAMPING)


CCT	CRI (Ra)	CRI (R9)	TM-30 Rf	TM-30 Rg	Duv
2700K	94	56	92	100	-0.0009
3000K	94	59	92	100	-0.0013
3500K	94	64	92	100	-0.0005
4000K	94	66	92	100	-0.0004




2700K, 90+CRI



3000K, 90+CRI



3500K, 90+CRI



4000K, 90+CRI



DRIVERS

PRODUCT CODE	DRIVER DETAILS
	DESCRIPTION
V00	0-10V dimming down to 1% with electronic dim-to-off (0%).
V01	0-10V dimming down to 1%.
LDE	Lutron Hi-Lume (LDE1) 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.
P01	TRIAC Forward Phase 2-Wire and ELV Reverse Phase 3-Wire hybrid LED driver. Dimming down to 1%. 120VAC only.
ELO	EldoLED 0-10V SOLODrive 0.1% dimming with electronic dim-to-off (0%).
DAL	DALI flicker-free dimming down to 1% with electronic dim-to-off (0%).
DMX	DMX flicker-free dimming down to 0%.
POE/READY	Specify a POE driver of your choice. Fixture supplied with low voltage leads and no LED driver. Contact ALW to register your project.

*Most drivers can be programmed to specific dimming levels if desired. Contact ALW for specific dimming level requests.

ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. If there are specific components required for your application that aren't listed on this spec sheet, please contact ALW customer support to specify a compatible solution of your choice.

DRIVER/LED COMPATIBILITY						
	STD	STD/BIOS	TUNE*	RGB OR RGBW	CA TITLE 24 JA8/JA10 ²¹	IEEE P1789 & HD TV STUDIO ²²
V00	●	●	●		●	
V01	●	●	●		●	
LDE	●	●			●	●
P01	●	●			●	
ELO	●	●	●		●	●
DALI	●	●	●		●	
DMX	●	●	●	●	PER REQUEST	PER REQUEST
POE/READY	PER REQUEST					

*ELO with TUNE Lamping will include an EldoLED DUALDrive 0-10V Tunable White LED Driver.

DRIVER LOCATION*						
	LED LAMPING TYPE*					
	STATIC WHITE	TW (TUNABLE WHITE)	RB (RGB)	RW (RGB + 3500K WHITE 80 CRI)	BS (BIOS STATIC, 80 CRI)	BD (BIOS DYNAMIC, 80 CRI)
V00	●	●	X	X	●	●
V01	●	●	X	X	●	●
LDE	●	●	N/A	N/A	●	N/A
P01	●	●	N/A	N/A	●	●
ELO	●	●	X	X	●	●
DALI	●	●	N/A	N/A	●	●
DMX	●	●	X	X	●	●
POE	X	X	X	X	X	X
CM	TBD	TBD	TBD	TBD	TBD	TBD

● - Indicates compatibility

* Standard lamping (STD) - 350 - 1200 lm/ft

²¹ Fixtures specified with 90CRI 2700K, 3000K, 3500K, 4000K, and 5000K lamping with applicable LED drivers have the ability to conform to California Title 24 JA8 and JA10 Appendices

²² The following drivers conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers'. These drivers may also be installed in HD TV Studio applications utilizing high frequency camera equipment.

● - Indicates integral driver

X - Indicates remote driver



* LPX1 Standard specification has integral drivers. Some LED driver/LED lamping combinations require a remote driver installation as driver does not fit in the fixture body.

** This table assumes no embedded controls are specified. See the [ALW Controls Guide](#) for further information of LED driver/embedded control locations.

Rev 110325



PHOTOMETRICS - STANDARD LENSES

OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) ²³ (0° - 180°) (90° - 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
SL (F) Standard Lambertian Flush		6 ft	11.9	1.26 1.24	428.8	1218
		8 ft	6.7			
		10 ft	4.3			
		12 ft	3.0			
		14 ft	2.2			
		16 ft	1.7			
SL (R) Standard Lambertian 3/4" Regressed		6 ft	13.5	1.26 1.08	486.7	1091
		8 ft	7.6			
		10 ft	4.9			
		12 ft	3.4			
		14 ft	2.5			
		16 ft	1.9			

*Photometric calculations based on 1200lm 3500K 80 CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW Lightplane+ IES File Multipliers Chart](#)

²³Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.
Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



ADDITIONAL OPTIONS & SPECIFICATIONS

LED PERFORMANCE

L70 Calculated: 180,000hrs (80CRI), 171,000hrs (90+CRI)
L80 Calculated: 119,000hrs (80CRI), 108,000hrs (90+CRI)
L90 Calculated: 58,000hrs (80CRI), 53,000hrs (90+CRI)


HOUSING

100% recyclable, extruded architectural grade 6063 aluminum with a 0.09" minimum wall thickness.

LENS & OPTICS

LPX1R has two different lens types: Flush and Regressed. Available optics includes:

Lambertian (*more optics available soon*)

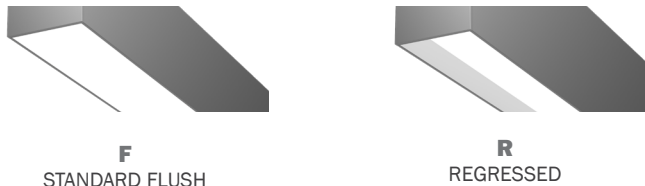

SAFETY & REGULATORY

UL Listed (U.S. & Canada). Suitable for dry or damp locations.

Integral Driver Models:

UL 1598 Luminaires (US), CSA C22.2 No. 250.0:21 (CA)

Remote Driver Models:

UL 2108 Luminaires (US), CSA C22.2 No. 250.2 (CA)

Fixtures specified with 90CRI, 2700K, 3000K, 3500K, and 4000K lamping with applicable LED drivers have the ability to conform to **California Title 24 JA8 and JA10** Appendices. EldoLED and Lutron conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers.

DECLARE

Select LightPlane+ models are Declared and Red List Approved. Declare Label is a comprehensive product transparency platform designed to empower manufacturers, designers, and consumers with detailed information about the ingredients and environmental impact of building products. Managed by the International Living Future Institute (ILFI), the platform provides a standardized "nutrition label" for products, disclosing material content, sourcing details, and the end-of-life potential. This initiative supports the Living Building Challenge by promoting sustainable and healthy materials, facilitating informed choices in the architecture and construction industries, and fostering transparency and accountability in the manufacturing process.

OPERATING TEMPERATURE

Luminaire should be installed and operated in environments where the ambient temperature ranges from -4°F to 122°F (-20°C to 50°C). Luminaire operation in environments outside the listed temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and color consistency.

WEIGHT

Approximately 2lbs. per linear foot. Weight may vary depending on additional options selected.

EMERGENCY OPTIONS

Emergency options are available for various applications including 10W Emergency Batteries (EMB), EMC circuits (EMC), and Generator Transfer Devices (GTD). Contact ALW for emergency component spec sheets.

EMBEDDED CONTROLS, SENSORS, & OEM COMPONENTS

ALW lighting fixtures are intended for use with a wide range of embedded OEM components (control devices, occupancy and photocell sensors, LED drivers) for use with specified building management systems. Our component portfolio is continually expanding to adopt to the latest technologies and specification needs.

ALW is your embedded controls partner, supporting integration with Acuity, Avi-on, Casambi, Cooper Wavelinx, Encelium, Lutron, NX Controls, Wattstopper, eldoLED, Philips, Molex PoE, NuLEDs POE, WTEC Smartengine POE, and more. If there's a component or system required that you don't see on the spec sheet please contact ALW customer support today so we can review your requirements.

IMPORTANT

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.