



LIGHTPLANE+ 3P


LPX3P | RECESSED PERIMETER



SPECIFICATIONS

PROFILE	3 1/8" Aperture, 3 3/16" height (Shortest height listed above. See mechanical diagrams for other heights)
LENGTHS	Build-to-Order: Individual/Continuous Lengths Shapes/Patterns
LED OUTPUT	350lm/ft - 1,500lm/ft, up to 169 lm/W
CCT/CRI	2700K/3000K/3500K/4000K/5000K • 80 or 90+ CRI Tunable White (2700K – 6500K) • RGB and RGB+W
DIMMING/ DRIVER	Integral and Remote Driver: 0-10V, Phase, DALI, DMX, eldoLED, Lutron®, PoE (Molex, NuLEDs, WTEC Smartengine). Dimming to 0% for select models
EMBEDDED CONTROLS	Acuity nLight, Avi-on, Casambi, Cooper Wavelinx, Encelium, Lutron Athena, Lutron Vive, NX Controls, Wattstopper, and more
POWER	3W - 11W per ft
INPUT	120VAC, 277VAC, or 347VAC
OPTICS	Lambertian, Low Glare, Asymmetric
LENS	Standard press fit lens in Flush, Regressed & 3" Regressed. ControlRoll continuous lenses in Flush.
FINISHES	16 powder coat finishes. RAL and Custom finishes also available
MATERIAL	6063-T6 Extruded Aluminum, See Declare listing here
ENVIRONMENT	Dry or damp locations. IC Rated.
WARRANTY	11 years
WELL/UGR	See ALW WELL & BIOS pages for recommended options that contribute to meeting the WELL Building Standard™

DISTRIBUTIONS & PROFILES

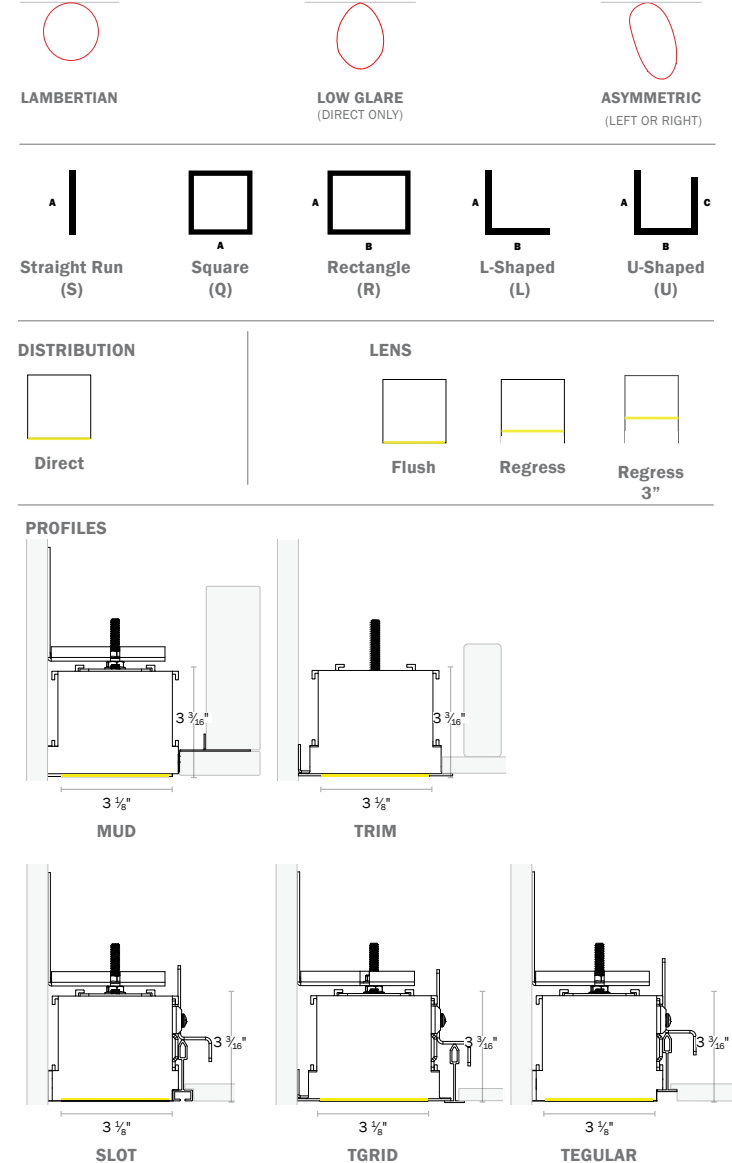

For details on fixture height and center-to-center dimensions see mechanical diagrams on page 5.
Not to scale. Dimensions are nominal. Consult factory for CAD drawing





PRODUCT SPECIFICATION SHEET

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----

EXAMPLE: LPX3PMDFN – S8 – 053090SLV00 – SW – N – UNV – EMC/2 – N – CP – DC – QS

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

1. FAMILY	2. SIZE	3. MODEL (CHOOSE 1)	4. MOUNTING (CHOOSE 1)	5. LENS TYPE (CHOOSE 1)
LPX Lightplane [†]	4 3"	P Recessed Perimeter Direct	MD Mud TM ^{1,2} Trim ST Slot T9 TGrid 9/16 T5 TGrid 15/16 G9 Tegular 9/16 G5 Tegular 15/16 AW ^{1,3} Armstrong Woodworks® AM ^{1,3} Armstrong Metalworks®	FN ⁴ Flush Lens RN ⁴ Regress Lens (3/4") GN ⁴ Regress Lens (3") CN ⁵ ControlRoll Flush Lens ⁴ Available in Lambertian (SL) Optic only. ⁵ Available in all Optic Types (SL, LG, AL, AR).

¹For install in wood, drywall, metal, etc.

²Not compatible with 3" regressed lens option (R3)


³All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.

6. SHAPE/LENGTH* (CHOOSE 1 & ENTER LENGTH IN FEET) - FOR CUSTOM ANGLES, CONTACT ALW	7. LUMENS* (CHOOSE 1)	8. CCT (CHOOSE 1)
---	-----------------------	-------------------

S__ Individual/Straight Run Section (enter length in product code above, ex. S18)
Q__ Square Configuration (enter side length A, ex: Q18)
R__/_ Rectangular Configuration (enter side lengths A and B, ex. R12/24)
L__/_ L-Shaped Configuration (enter side lengths A and B, ex. L12/24)
U__/_/_ U-Shaped Configuration (enter side lengths A, B, and C, ex. U12/12/24)

* Lengths greater than 8' consist of multiple individual housing sections joined together. Lengths are nominal and may vary based on lamping and other specification selections. Consult ALW when exact lengths are required.

* ALW regularly builds simple and complex mitered patterns not shown above. Contact ALW and provide a RCP with your layout to get started.



Shape orientation (Looking from the Ceiling down to the floor).

03 350lm/ft
05 500lm/ft
07 750lm/ft
10 1000lm/ft
12 1200lm/ft
15⁶ 1500lm/ft
RB⁷ RGB
RW⁷ RGB + 3500K White, 80CRI
BO/_/_/_⁸ BIOS. 80 CRI. Choose your lm/ft
CM/_/_/_⁹ Custom Lumens. Write in your lumens/ft (ex: 0100 = 100lm/ft).

N Choose for RB, RW, or BO
27¹⁰ 2700K
30 3000K
35 3500K
40 4000K
50¹¹ 5000K
TW¹² Tunable White, 90CRI, 2700K - 6500K

¹⁰2700K only available in 90CRI.

¹¹5000K only available in 80CRI.

¹²Tunable White (TW) not available with BIOS. BIOS has its own tunable white option to be specified by request.

*For delivered lumens power, see 'Performance Details' on p. 8.

⁶1500lm/ft option only available with ControlRoll lenses.

⁷Available in Lambertian (SL) Optic only.

⁸Write in desired lm/ft (100 - 1200lm/ft). Static BIOS SkyBlue® 490nm LED is always on. Dynamic BIOS SkyBlue® 490nm LED can be tuned off.

⁹Custom lumens available from 100 - 1500lm/ft.

9. CRI (CHOOSE 1)	10. OPTICS* (CHOOSE 1)	11. DRIVER* (CHOOSE 1)
N Choose for RB, RW, or TW 80 80CRI 90 90CRI	SL ¹³ Standard Lambertian LG ¹⁴ Low Glare AL ¹⁴ Asymmetric Left (outside of shape) AR ¹⁴ Asymmetric Right (inside of shape)	QS V00 0-10V, dim to 0% QS V01 0-10V, dim to 1% LDE Lutron LDE1 Ecosystem, dim to 1% P01 ¹⁵ ELV/TRIAC phase dim to 1% EL0 eldoLED, 0-10V dim to 0% DAL DALI, dim to 0% DMX DMX, dim to 0% POE ¹⁶ POE Ready CM ¹⁷ Custom driver

*See LEED + WELL guide for optic/output combos that fall under standard UGR and intensity levels

¹³Available in all Lens Types.

¹⁴Only available with ControlRoll (C) Lens . optics. See p. 4 for LED and Optics Compatibility.

¹⁵See p. 4 for explanation of Asymmetric Lens specification.



*See 'LED DRIVERS' on p. 11 for various tables. 'Driver Details' has a full description of each driver spec. 'Driver/LED Compatibility' describes the compatible driver and LED combinations. 'Driver Location' describes the driver location (integral or remote) depending on the LED you choose.

¹⁶Phase dim drivers are 120 VAC only.



¹⁷Luminaire built as a driverless fixture. Contact ALW with your POE node specs and we will provide fixture voltage, current, and wattage details for PoE node commissioning.

¹⁸Contact ALW to specify special request 3rd party LED drivers

Rev 110325



PRODUCT SPECIFICATION SHEET CONT'D

12. FINISH* (CHOOSE 1)	13. MOUNTING DETAILS (CHOOSE 1)	14. VOLTAGE (CHOOSE 1)	15. EMERGENCY CIRCUITS (OPTIONAL)
STANDARD FINISHES SW ☐ Satin White SB ☒ Satin Black AS ☐ Aluminum Silver Anodized Effect TB ☒ Textured Black PREMIUM FINISHES --- See chart on page 9 for more standard finishes. Manually type in the finish code (Ex: OB = Oil-Rubbed Bronze) SPECIAL ORDER FINISHES* RAL _____ Specify RAL Classic Color (Ex: RAL 3003) CCM _____ Specify Catalog Colors Custom Color Match	N None. Choose for straight sections I Inside Edge. Light is mounted to inner corners/walls O Outside Edge. Light is mounted to outer corners/walls  	UNV¹⁸ Universal Voltage (120VAC-277VAC) 347¹⁹ 347 Volt (Driver options may be limited. Not available with EMB) ¹⁸ Choose UNV for phase dimming driver (Po1) but is available in 120VAC only. ¹⁹ 347V available with 0-10V drivers only. Not available with Emergency Battery (EMB).	N None EMC/___²⁰ Emergency power feed whip for connection to remote Generator Transfer Devices (Specify 1x for every 4ft or contact ALW for longer runs) EMB/___ 10W Integral Emergency Battery (Specify 1x for every 4ft of emergency lighting) GTD/___ Integral Generator Transfer Device/Switch Bypass - 3A (Specify 1x for every 4ft) ALC/___ Integral Automated Load Control Relay - 10A (Specify 1x for every 4ft or contact ALW for longer runs)

*Manually type in the finish code for special order finishes types

*Emergency Battery options are direct lighting only. EMBs deliver roughly 1100 total lumens, or 275lm/ft for a 4ft section.

²⁰ No EM components provided. EMC lengths come standard as 4ft. Contact ALW for entire fixture to be EMC or if you'd like longer lengths. Power whip will be labeled as EMC.

16. CONTROL OPTIONS* (OPTIONAL)	17. ADDITIONAL OPTIONS - A (OPTIONAL)	18. ADDITIONAL OPTIONS - B* (INCLUDED)
N None FACTORY CONTROLS OS/PH/INT/___ Integral Occupancy/Daylight sensor OS/PH/HV/___ Remote Occupancy/Daylight sensor	N None CP Chicago Plenum	DC Living Building Challenge Declared or Red List Approved [*] See Declare page for LP+ Declare listing

Embedded controls below are placeholder specs. See the [ALW Controls Guide](#) to finalize your final control spec.

AY/xx	Acuity
AN/xx	Avi-on
CA/xx	Casambi
CW/xx/___	Cooper Wavelinx
EC/xx/___	Encelium
EN/xx/___	Enlighted
LU/xx/___	Lutron
NX/xx/___	NX Controls
WA/xx/___	Wattstopper

*Quickship availability on occupancy and photocell daylight sensors may vary. Contact ALW for more information.

^{*} Contact ALW for Additional Zone specifications.

^{*} See the [ALW Controls Guide](#) for embedded control compatibility and driver control location.


Rev 110325




LENS & OPTICS COMPATIBILITY

		LENS/OPTICS COMPATIBILITY		
		OPTICS		
		STANDARD LAMBERTIAN (SL)	LOW GLARE (LG)	ASYMMETRIC (AL, AR)
LENS TYPES	FLUSH (FN)	●		
	CONTROLROLL FLUSH (CN)	●	●	●
	REGRESSED (RN)	●		
	REGRESSED 3" (GN)	●		

ASYMMETRIC LEFT (AL)

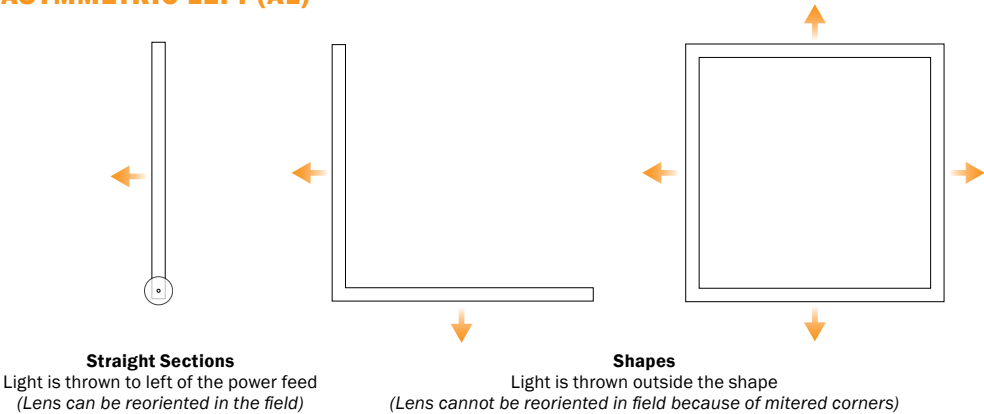

ASYMMETRIC RIGHT (AR)

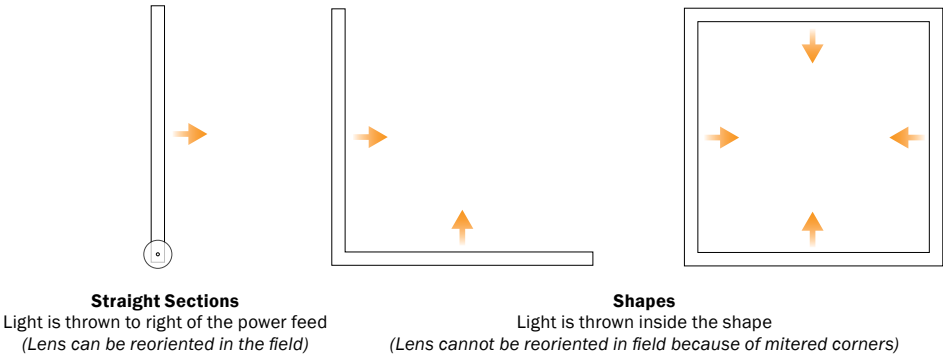





LENS DETAILS

Applicable to all models


— FIXTURE BODY — LENS




FN
FLUSH



CN
CONTROL ROLL FLUSH




RN
REGRESS LENS




GN
3" REGRESS LENS


MECHANICAL DIAGRAMS

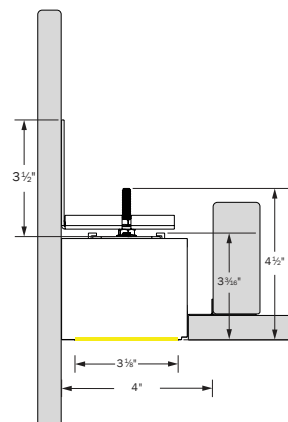


LPX3PMDFN
RECESSED PERIMETER MUD-IN
FLUSH LENS

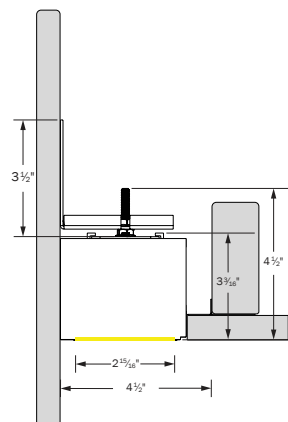


LPX3PMDCN
RECESSED PERIMETER MUD-IN
CONTROL ROLL LENS

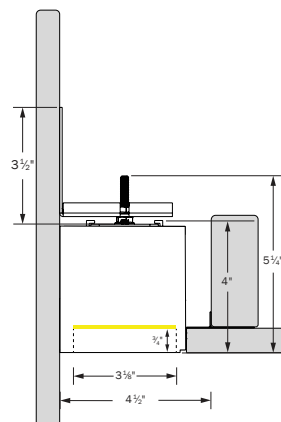


LPX3PMDRN
RECESSED PERIMETER MUD-IN
REGRESSED LENS

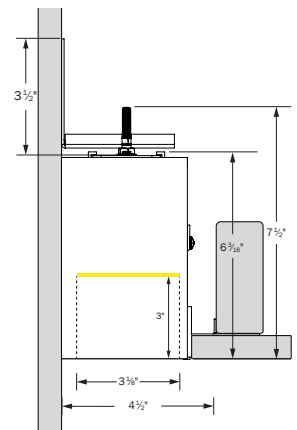


LPX3PMDGN
RECESSED PERIMETER MUD-IN
3" REGRESSED LENS

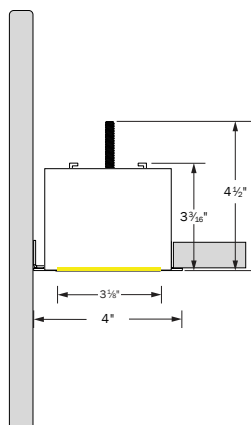

LPX3PTMFN
RECESSED PERIMETER TRIM
FLUSH LENS

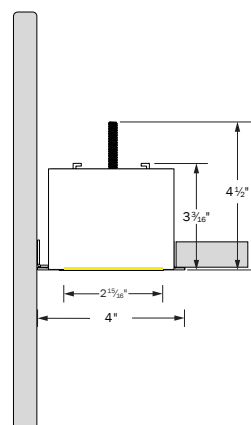

LPX3PTMCN
RECESSED PERIMETER TRIM
CONTROL ROLL LENS

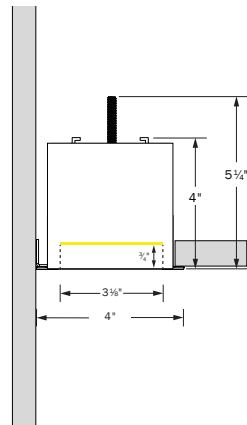


LPX3PTMRN
RECESSED PERIMETER TRIM
REGRESSED LENS


Rev 110325




MECHANICAL DIAGRAMS CONT'D

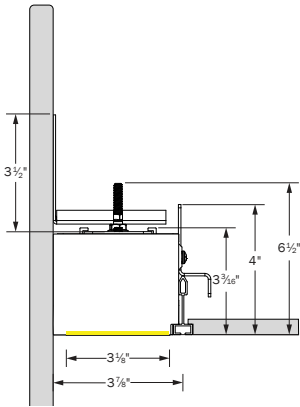


LPX3PSTFN
RECESSED PERIMETER SLOT
FLUSH LENS

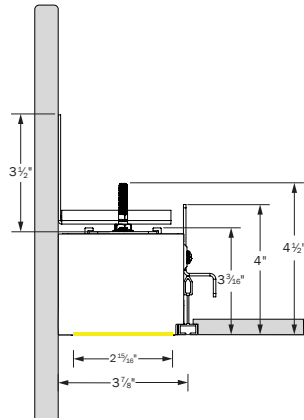


LPX3PSTCN
RECESSED PERIMETER SLOT
CONTROL ROLL LENS

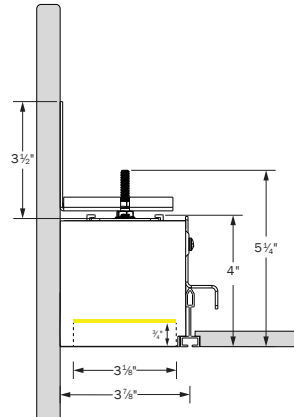


LPX3PSTRN
RECESSED PERIMETER SLOT
REGRESSED LENS

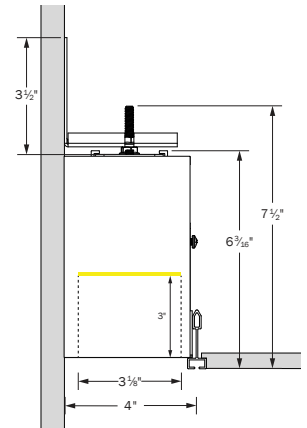


LPX3PSTGN
RECESSED PERIMETER SLOT
3" REGRESSED LENS

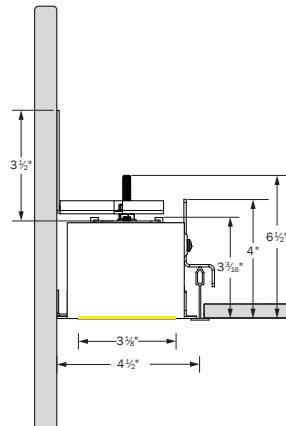


LPX3PT9FN
RECESSED PERIMETER TGRID 9/16
FLUSH LENS

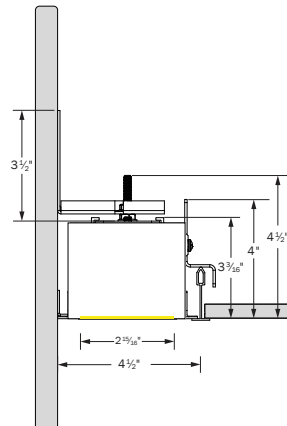


LPX3PT9CN
RECESSED PERIMETER TGRID 9/16
CONTROL ROLL LENS

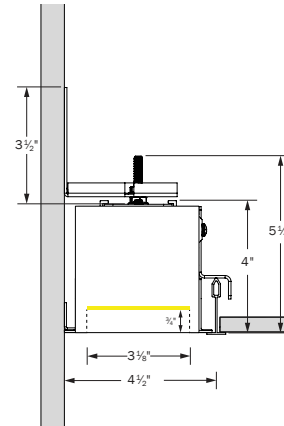


LPX3PT9RN
RECESSED PERIMETER TGRID 9/16
REGRESSED LENS

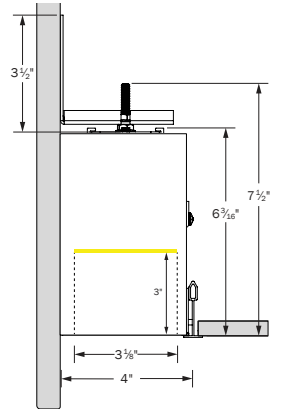


LPX3PT9GN
RECESSED PERIMETER TGRID 9/16
3" REGRESSED LENS

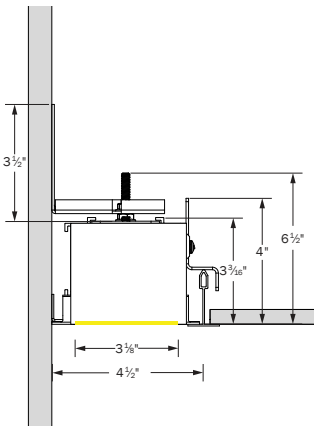


LPX3PT5FN
RECESSED PERIMETER TGRID 15/16
FLUSH LENS

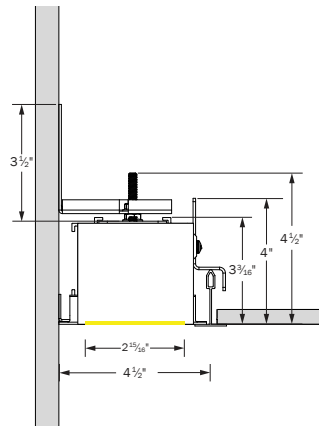

LPX3PT5CN
RECESSED PERIMETER TGRID 15/16
CONTROL ROLL LENS

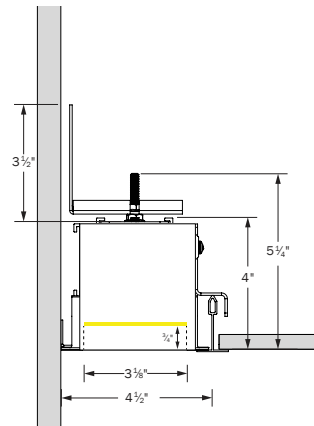

LPX3PT5RN
RECESSED PERIMETER TGRID 15/16
REGRESSED LENS

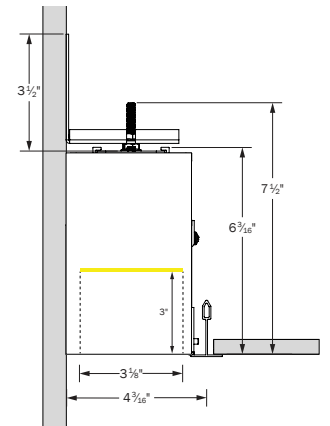


LPX3PT5GN
RECESSED PERIMETER TGRID 15/16
3" REGRESSED LENS


Rev 110325




MECHANICAL DIAGRAMS CONT'D

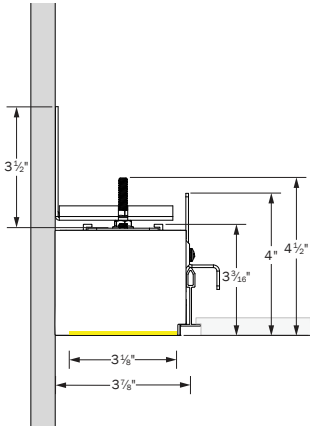


LPX3PG9FN
RECESSED PERIMETER
TEGULAR 9/16
FLUSH LENS

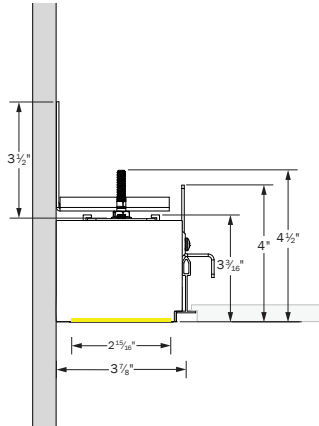


LPX3PG9CN
RECESSED PERIMETER
TEGULAR 9/16
CONTROL ROLL LENS

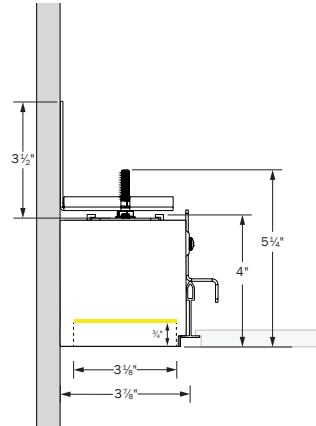


LPX3PG9RN
RECESSED PERIMETER
TEGULAR 9/16
REGRESSED LENS

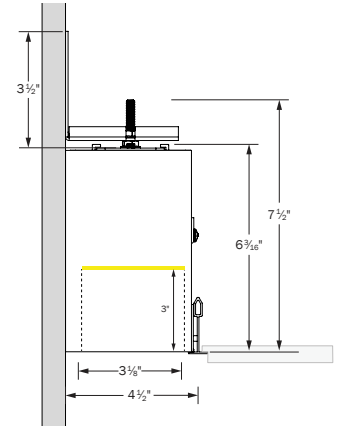


LPX3PG9GN
RECESSED PERIMETER
TEGULAR 9/16
3" REGRESSED LENS

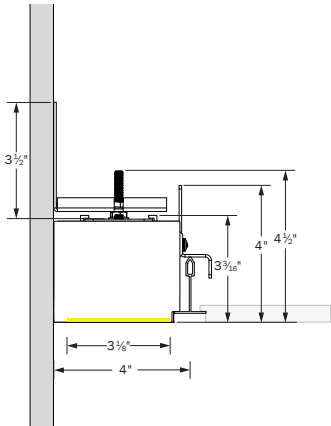


LPX3PG5FN
RECESSED PERIMETER
TEGULAR 15/16
FLUSH LENS

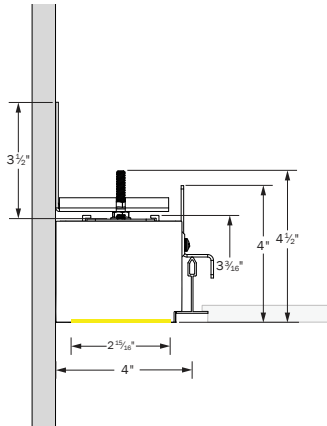


LPX3PG5CN
RECESSED PERIMETER
TEGULAR 15/16
CONTROL ROLL LENS

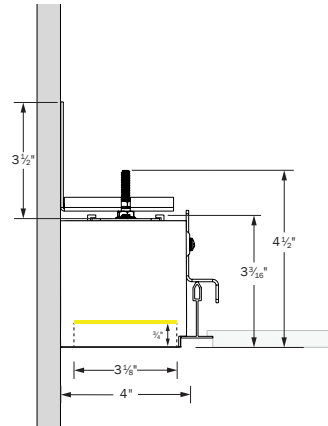

LPX3PG5RN
RECESSED PERIMETER
TEGULAR 15/16
REGRESSED LENS

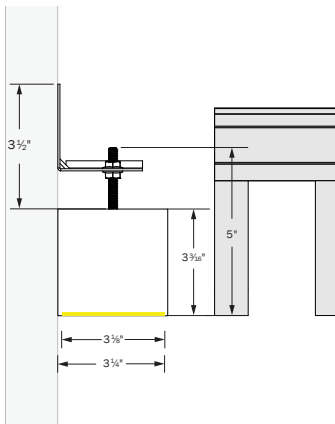

LPX3PAWFN
RECESSED PERIMETER
ARMSTRONG WOODWORKS®
FLUSH LENS

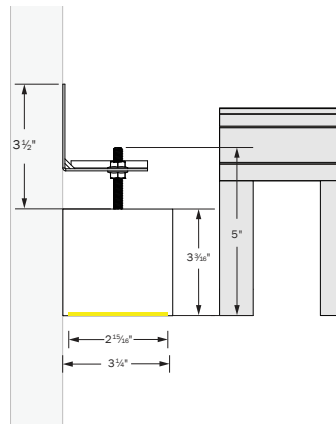


LPX3PAWFN
RECESSED PERIMETER
ARMSTRONG WOODWORKS®
CONTROL ROLL LENS


Rev 110325



MECHANICAL DIAGRAMS CONT'D

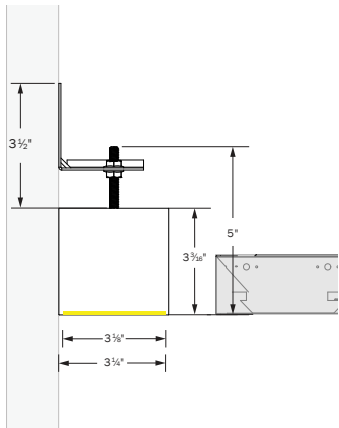

LPX3PAWFN
RECESSED PERIMETER
ARMSTRONG METALWORKS®
FLUSH LENS

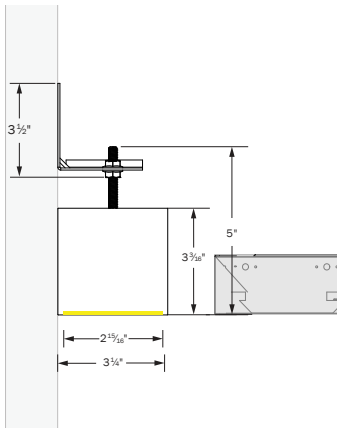

LPX3PAWFN
RECESSED PERIMETER
ARMSTRONG METALWORKS®
CONTROL ROLL LENS




FINISHES

Standard finishes are available at no additional charge.

STANDARD FINISHES - QS ELIGIBLE




Satin
White
QS



Aluminum Silver
Anodized Effect
QS



Satin
Black
QS



Textured
Black
QS

PREMIUM FINISHES


BASIC POWDER COAT



Gloss
White



Antimicrobial
Gloss White



Textured
Matte
White

METALLIC POWDER COAT



Charcoal
Gray



Copper



Brass

SATIN ANODIZED EFFECT POWDER COAT



Oil-Rubbed
Bronze



Dark
Bronze

GLOSS POWDER COAT (80-95% GLOSS)



Orange
RAL 2003



Red
RAL 3020



Magenta
RAL 4010



Blue
RAL 5015

Contact ALW Quotes (quotes@alw-inc.com) for sample paint finish swatches.

SPECIAL ORDER FINISHES*



RAL CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

Most RAL Classic Colors are available for a minimum setup fee. On your specification submittal choose your RAL color by entering the 4-digit RAL code (Ex: RAL 3003). See www.alw-inc.com/resources/finishes



CUSTOM COLOR MATCH: CCM_ _ _ _

Custom powder coat color matching is available for a premium setup fee. Consult ALW for additional information.

*An individual setup fee will apply to each unique Special Order Finish per purchase order.
(ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)

*Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying



PERFORMANCE DETAILS - STANDARD LENSES

OUTPUT OPTION	OPTIC TYPE	DELIVERED LUMENS/FT	EFFICACY (LM/W)	WATTS/FT ²¹	CRI OPTIONS	CCT OPTIONS
03 ²²	SL	354	127	2.8	80 90+	2700K 3000K 3500K 4000K 5000K
	SL (3/4" Regress)	363	112	3.3		
	SL (3" Regress)	342	105	3.3		
05 ²²	SL	514	123	4.2		
	SL (3/4" Regress)	504	109	4.6		
	SL (3" Regress)	497	102	4.8		
07 ²²	SL	773	120	6.4		
	SL (3/4" Regress)	756	106	7.1		
	SL (3" Regress)	733	100	7.3		
10 ²²	SL	1000	118	8.5		
	SL (3/4" Regress)	1022	104	9.8		
	SL (3" Regress)	1003	98	10.2		
12 ²²	SL	1220	117	10.5		
	SL (3/4" Regress)	1214	103	11.8		
	SL (3" Regress)	1202	96	12.5		
TUNE	SL (Warm White)	559	90	6.2	90	2700K - 6500K
	SL (Cool White)	592	96	6.2		
RGB ²³	SL	111	24	4.7	-	
RGBW ²³	SL (White)	107	58	1.90	W: 80 CRI	W: 3500K
	SL (RGB)	111	23	4.8		

²¹ Lumens/Watt and Watts/ft have been calculated assuming a driver efficiency of 85%. Depending on field conditions, actual measured values may fluctuate by 5-8%.

²² Performance calculations are based on LM-79 test of 1200lm output at 80 CRI and 3500K. All other output calculations are extrapolated values.

²³ Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue) and White LED only illuminated



PERFORMANCE DETAILS - CONTROLROLL

OUTPUT OPTION	OPTIC TYPE	DELIVERED LUMENS/FT	EFFICACY (LM/W)	WATTS/FT ²¹	CRI OPTIONS	CCT OPTIONS
03 ²²	CR SL (Lambertian)	358	139	2.3	80+ 90+	2700K 3000K 3500K 4000K 5000K
	CR AL (Asymmetric)	342	146			
	CR LG (LowGlare)	377	146			
05 ²²	CR SL (Lambertian)	505	136	3.5		
	CR AL (Asymmetric)	494	142			
	CR LG (LowGlare)	500	143			
07 ²²	CR SL (Lambertian)	762	132	5.3		
	CR AL (Asymmetric)	732	138			
	CR LG (LowGlare)	771	139			
10 ²²	CR SL (Lambertian)	1013	130	7.1		
	CR AL (Asymmetric)	965	136			
	CR LG (LowGlare)	1006	137			
12 ²²	CR SL (Lambertian)	1203	129	8.7		
	CR AL (Asymmetric)	1165	134			
	CR LG (LowGlare)	1207	136			
15 ²²	CR SL (Lambertian)	1519	126	11.1		
	CR AL (Asymmetric)	1469	132			
	CR LG (LowGlare)	1514	133			
TUNE	SL (Warm White)	612	99	6.2	90	2700K - 6500K
	SL (Cool White)	649	105			
RGB ²³	SL	122	26	4.64	N/A	
RGBW ²³	SL (White)	118	63	1.86	W: 80 CRI	W: 3500K
	SL (RGB)	122	26	4.76		

²¹Lumens/Watt and Watts/ft have been calculated assuming a driver efficiency of 85%. Depending on field conditions, actual measured values may fluctuate by 5-8%.


²²Performance calculations are based on LM-79 test of 600lm output at 80 CRI and 3500K. All other output calculations are extrapolated values.

²³Performance calculations are derived from LM-79 test with all RGB LEDs illuminated (Red, Green, Blue) and White LED only illuminated




TM-30-18 DETAILS (90 CRI LAMPING)


CCT	CRI (Ra)	CRI (R9)	TM-30 Rf	TM-30 Rg	Duv
2700K	94	56	92	100	-0.0009
3000K	94	59	92	100	-0.0013
3500K	94	64	92	100	-0.0005
4000K	94	66	92	100	-0.0004




2700K, 90+CRI



3000K, 90+CRI



3500K, 90+CRI



4000K, 90+CRI



DRIVERS

PRODUCT CODE	DRIVER DETAILS
	DESCRIPTION
V00	0-10V dimming down to 1% with electronic dim-to-off (0%).
V01	0-10V dimming down to 1%.
LDE	Lutron Hi-lume (LDE1) 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.
P01	TRIAC Forward Phase 2-Wire and ELV Reverse Phase 3-Wire hybrid LED driver. Dimming down to 1%. 120VAC only.
ELO	EldoLED 0-10V SOLODrive 0.1% dimming with electronic dim-to-off (0%).
DAL	DALI flicker-free dimming down to 1% with electronic dim-to-off (0%).
DMX	DMX flicker-free dimming down to 0%.
POE/READY	Specify a POE driver of your choice. Fixture supplied with low voltage leads and no LED driver. Contact ALW to register your project.

* Most drivers can be programmed to specific dimming levels if desired. Contact ALW for specific dimming level requests.

ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. If there are specific components required for your application that aren't listed on this spec sheet, please contact ALW customer support to specify a compatible solution of your choice.

DRIVER/LED LAMPING COMPATIBILITY						
	STD	STD/BIOS	TUNE*	RGB OR RGBW	CA TITLE 24 JA8/JA10 ²⁴	IEEE P1789 & HD TV STUDIO ²⁵
V00	●	●	●		●	
V01	●	●	●		●	
LDE	●	●			●	●
P01	●	●			●	
ELO	●	●	●		●	●
DALI	●	●	●		●	
DMX	●	●	●	●	PER REQUEST	PER REQUEST
POE/READY	PER REQUEST					

● - Indicates compatibility

* Standard lamping (STD) - 350 - 1500 lm/ft




²⁴ Fixtures specified with 90CRI 2700K, 3000K, 3500K, 4000K. and 5000K lamping with applicable LED drivers have the ability to conform to California Title 24 JA8 and JA10 Appendices

²⁵ The following drivers conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers'. These drivers may also be installed in HD TV Studio applications utilizing high frequency camera equipment.

*ELO with TUNE Lamping will include an EldoLED DUALDrive 0-10V Tunable White LED Driver.



PHOTOMETRICS - STANDARD LENSES

OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) ²⁶ (0° - 180°) (90° - 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
SL (FN) Standard Lambertian Flush		6 ft	11.6	1.28 1.26	419.3	1221
		8 ft	6.6			
		10 ft	4.2			
		12 ft	2.9			
		14 ft	2.1			
		16 ft	1.6			
SL (RN) Standard Lambertian 3/4" Regressed		6 ft	13.5	1.26 1.22	485	1277
		8 ft	7.6			
		10 ft	4.9			
		12 ft	3.4			
		14 ft	2.5			
		16 ft	1.9			
SL (RG) Standard Lambertian 3" Regressed		6 ft	16.3	1.23 1.01	567	1151
		8 ft	9.1			
		10 ft	5.9			
		12 ft	4.1			
		14 ft	3.0			
		16 ft	2.3			




*Photometric calculations based on 1200lm 3500K 80 CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW Lightplane+ IES File Multipliers Chart](#)

²⁶Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.
Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



PHOTOMETRICS - CONTROLROLL

OPTIC	POLAR PLOT (CD)	MTG HEIGHT	LIGHT LEVEL (FC)	SPACING CRITERION (SC) ²⁶ (0° - 180°) (90° - 270°)	MAX INTENSITY (CD)	OUTPUT (LM/FT)
SL (CN) Standard Lambertian ControlRoll		6 ft	15.5	1.22 1.22	557	1517
		8 ft	8.7			
		10 ft	5.6			
		12 ft	3.9			
		14 ft	2.8			
		16 ft	2.2			
LG (CN) Low Glare ControlRoll		6 ft	16.4	1.14 1.02	590	1513
		8 ft	9.2			
		10 ft	5.9			
		12 ft	4.1			
		14 ft	3.0			
		16 ft	2.3			
AR (CN) Asymmetric Right ControlRoll		6 ft	15.5	1.22 1.42	627	1467
		8 ft	8.7			
		10 ft	5.6			
		12 ft	3.9			
		14 ft	2.8			
		16 ft	2.2			

* Photometric calculations based on 1ft length, 1500lm, 3500K, 80 CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW Lightplane+ IES File Multipliers Chart](#)

²⁶ Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.
Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



ADDITIONAL OPTIONS & SPECIFICATIONS

LED PERFORMANCE

L70 Calculated: 180,000hrs (80CRI), 171,000hrs (90+CRI)

L80 Calculated: 119,000hrs (80CRI), 108,000hrs (90+CRI)


L90 Calculated: 58,000hrs (80CRI), 53,000hrs (90+CRI)

HOUSING


100% recyclable, extruded architectural grade 6063 aluminum with a 0.09" minimum wall thickness.

LENS & OPTICS


LPX3P has four different lens types: Flush, ControlRoll Flush, Regressed, and 3" Regressed. A wide range of optics are available including, Lambertian, Asymmetric, and Low Glare. See page 4 for the Lens & Optics Compatibility chart.




F
STANDARD FLUSH



C
CONTROL ROLL FLUSH



R
REGRESSED



G
3" REGRESSED



The optically engineered ControlRoll lens provides smooth, uniform, and seamless illumination for linear lengths of 250' to eliminated lens gaps. ControlRoll lens rolls out and presses into the housing channel for easy installation.

SAFETY & REGULATORY

UL Listed (U.S. & Canada). Suitable for dry or damp locations. All recessed models are IC (Insulation Contact) Rated.

Integral Driver Models:

UL 1598 Luminaires (US), CSA C22.2 No. 250.0:21 (CA)

Remote Driver Models:

UL 2108 Luminaires (US), CSA C22.2 No. 250.2 (CA)

Fixtures specified with 90CRI, 2700K, 3000K, 3500K, and 4000K lamping with applicable LED drivers have the ability to conform to **California Title 24 JA8 and JA10** Appendices. EldoLED and Lutron conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers.

DECLARE

Select LightPlane+ models are Declared and Red List Approved. Declare Label is a comprehensive product transparency platform designed to empower manufacturers, designers, and consumers with detailed information about the ingredients and environmental impact of building products. Managed by the International Living Future Institute (ILFI), the platform provides a standardized "nutrition label" for products, disclosing material content, sourcing details, and the end-of-life potential. This initiative supports the Living Building Challenge by promoting sustainable and healthy materials, facilitating informed choices in the architecture and construction industries, and fostering transparency and accountability in the manufacturing process

OPERATING TEMPERATURE

Luminaire should be installed and operated in environments where the ambient temperature ranges from -4°F to 122°F (-20°C to 50°C). Luminaire operation in environments outside the listed temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and color consistency.

WEIGHT

Approximately 3lbs. per linear foot. Weight may vary depending on additional options selected.

EMERGENCY OPTIONS

Emergency options are available for various applications including 10W Emergency Batteries (EMB), EMC circuits (EMC), Generator Transfer Devices (GTD), and Automated Load Control Relays (ALC). Contact ALW for emergency component spec sheets.

EMBEDDED CONTROLS, SENSORS, & OEM COMPONENTS

ALW lighting fixtures are intended for use with a wide range of embedded OEM components (control devices, occupancy and photocell sensors, LED drivers) for use with specified building management systems. Our component portfolio is continually expanding to adopt to the latest technologies and specification needs.

ALW is your embedded controls partner, supporting integration with Acuity, Avi-on, Casambi, Cooper Wavelinx, Encelium, Enlighted, Lutron, NX Controls, Wattstopper, eldoLED, Philips, Molex POE, NuLEDs POE, WTEC Smartengine POE, and more. If there's a component or system required that you don't see on the spec sheet please contact **ALW customer support** today so we can review your requirements.

IMPORTANT

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Rev 110325